


# BISTAR

TP6F72M  
TP6F72M(H) **144 half-cell**

**395 - 415W**

9BB half-cut mono perc

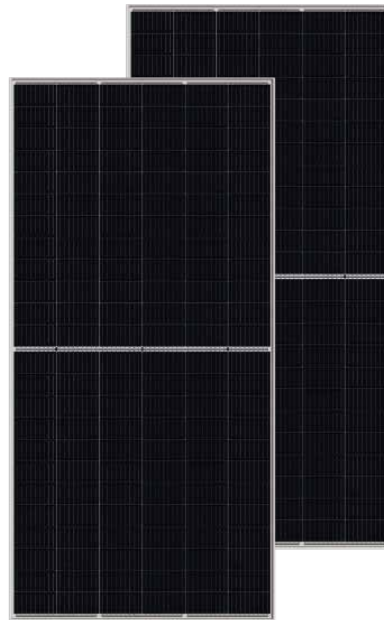

## KEY FEATURES



### 9BB half-cut cell technology

New circuit design, lower internal current, lower Rs loss



### Significantly lower the risk of hot spot

Special circuit design with much lower hot spot temperature



### Lower LCOE

2% more power generation, lower LCOE



### Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



### IP68 junction box

High waterproof level

## SYSTEM & PRODUCT CERTIFICATES

ISO 14001: 2015 Environment Management System

- ISO 45001: 2018 Occupational Health and Safety Management Systems




## PERFORMANCE WARRANTY

**12** years  
Quality assurance

**25** years  
Power output guarantee

Linear Performance Warranty

Standard Performance Warranty

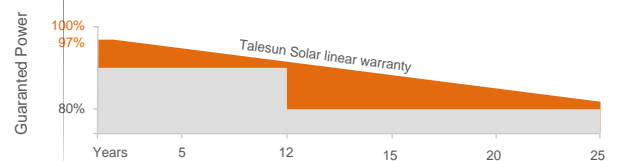

[Redacted text]

[Redacted text]

