




BISTAR

TP7F60M
TP7F60M(H) **120-cell**

440 - 460W

10BB Half-cut Mono Perc
Full Black

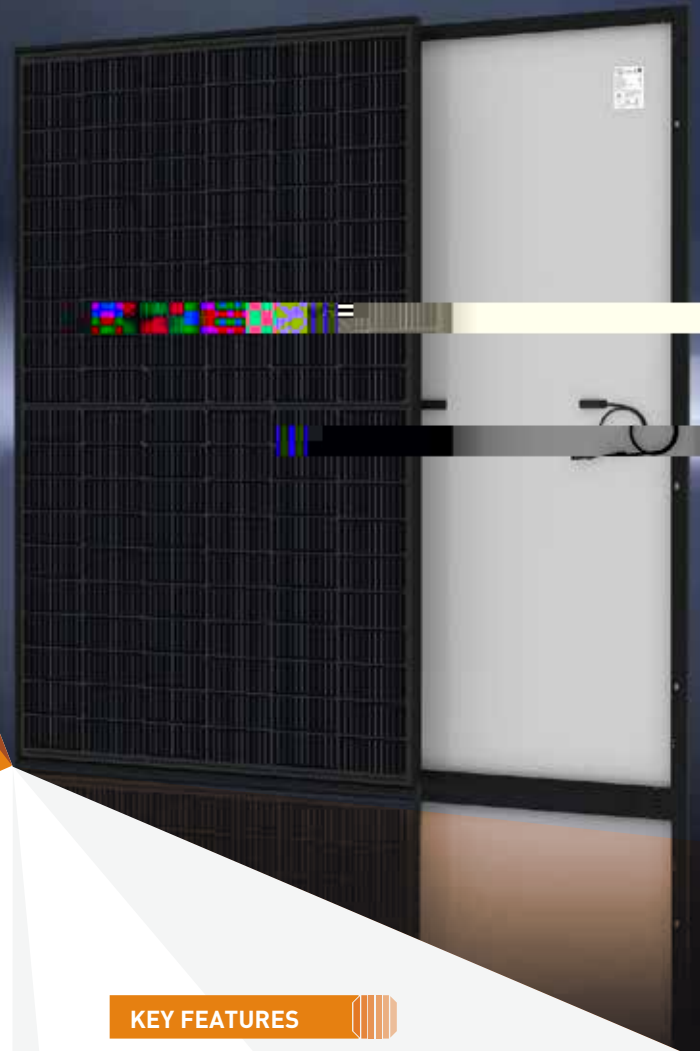

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY

12 Years
Quality Assurance

2 Years
Power Output Guarantee

Linear Performance Warranty

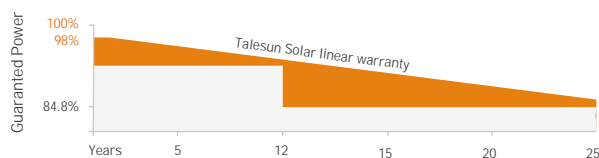

KEY FEATURES



10BB Half-cut Cell Technology

New circuit design, lower internal current, lower Rs loss
Ga doped wafer, attenuation <2% (1st year) / 0.55% (Linear)



Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



Lower LCOE

2% more power generation, lower LCOE



Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



IP68 Junction Box

High waterproof level

ELECTRICAL CHARACTERISTICS

| | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

: C. C :

MECHANICAL CHARACTERISTICS

| | |
|--|---------------------------------------------------------------------------|
| | Monocrystalline Silicon (10Busbar) |
| | 120pcs in series (6*20) |
| | 1908*1134*35mm (75.12*44.65*1.38inches) |
| | 24.3kg (53.6lbs.) |
| | |
| | Anodized Aluminium Alloy |
| | IP68, 3 Bypass Diodes |
| | 4mm ² (IEC), 12AWG(UL) 300mm in Length or Customized Length |
| | T01/LJQ-3-CSY/MC4/MC4-EV02 |

TEMPERATURE CHARACTERISTICS

| | |
|--|--|
| | |
| | |
| | |
| | |

