




# BIPRO

TM7G54M **108-cell**

415 - 435W

16BB Half-cut N-type  
Full Black

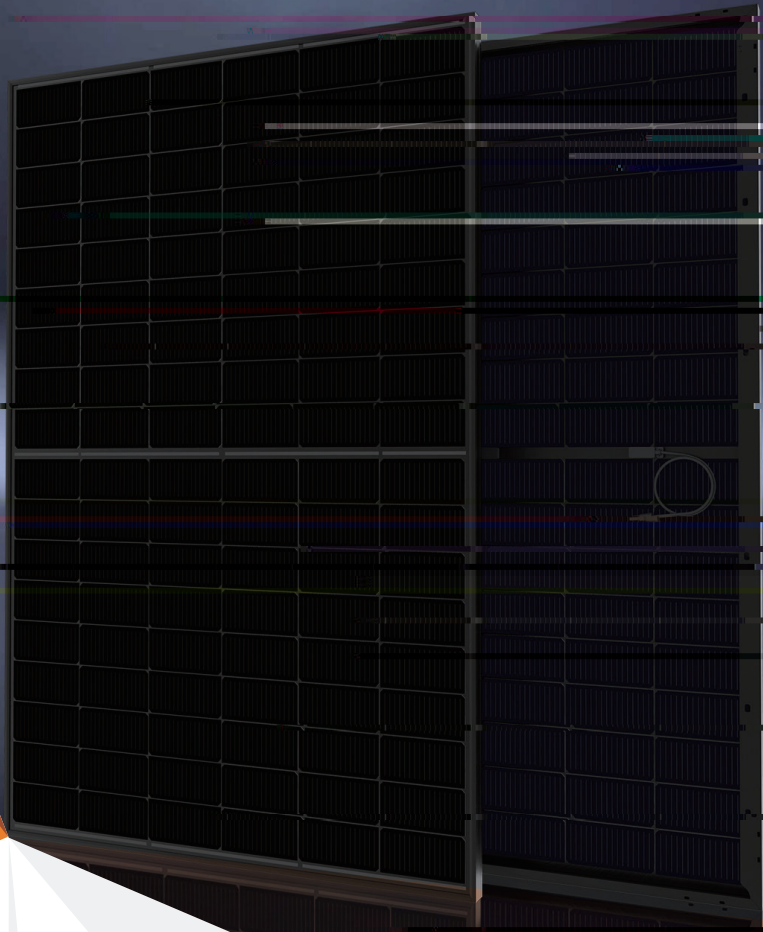

## SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




## PERFORMANCE WARRANTY

15 Years  
Quality Assurance

30 Years  
Power Output Guarantee

Linear Performance Warranty

Standard Performance Warranty

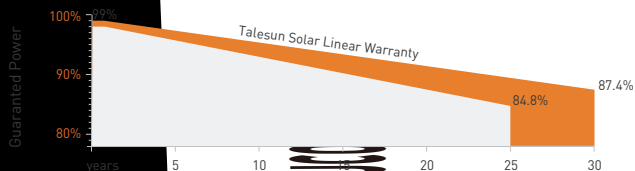

### Excellent Anti-PID Performance

192 hours Anti-PID test



### Wider Application

No water-permeability and high wear-resistance, can be widely used in high-humid, windy and dusty area



### IP68 Junction Box

High waterproof level

## ELECTRICAL CHARACTERISTICS

Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)										
Operating Voltage (Vmpp/V)										
Operating Current (Impp/A)										
Open-Circuit Voltage (Voc/V)										
Short-Circuit Current (Isc/A)										
Module Efficiency (%)	21.30		21.50		21.80		22.00		22.30	

STC: Irradiance 1000W/m<sup>2</sup>, Spectra at AM1.5, Module Temperature 25 °C. Power output tolerance: 0~+5W, Test uncertainty for Pmax: ±3%  
 NMOT: Irradiance 800W/m<sup>2</sup>, Spectra at AM1.5, Ambient Temperature 20 °C, Wind speed 1m/s

## REAR SIDE POWER GAIN(REFERENCE TO 425W FRONT)

Pmax gain	5%	10%	15%	20%	25%
Pmax/W	446	468	489	510	531
Vmpp/V	31.70	31.70	31.70	31.70	31.70
Impp/A	14.08	14.75	15.42	16.09	16.76
Voc/V	38.30	38.30	38.30	38.30	38.30
Isc/A	14.94	15.65	16.36	17.07	17.79

## MECHANICAL CHARACTERISTICS

Cell Type	N-type Mono-Crystallin (16Busbar)
No. of Cells	108pcs in series (6*18)
Module Dimensions	1722*1134*30mm (67.80*44.65*1.18inches)
Weight	24.5kg (54.01lbs)
Front Glass	
Back Glass	
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Output Cables	4mm <sup>2</sup> (IEC), 12AWG(UL) 350mm(+),250mm(-) or Customized Length
Connectors	T01/LJQ-3-CSY/MC4/MC4-EV02

## Electrical Performance

## APPLICATION CONDITIONS

Maximun System Voltage	1500V/DC
Operating Temperature	-40°C~+85°C
Maximun Series Fuse	30A
Safety Protection Class	Class II
Mechanical Load	Front side 5400Pa, Back side 2400Pa
Refer. Bifaciality Factor	80%±5%

## TECHNICAL DRAWINGS

## TEMPERATURE CHARACTERISTICS

Temperature Coefficient of Pmax	
Temperature Coefficient of Voc	
Temperature Coefficient of Isc	
Nominal Module Operating Temperature(NMOT)	

## PACKING CONFIGURATION

Pieces Per Pallet	
Pieces Per Container(40'HQ)	



a a

au

b



a a

a

a



a

a a a a



a

a

BTU T