



BIPRO

144-cell



SYSTEM & PRODUCT CERTIFICATES

-
-
-
-



PERFORMANCE WARRANTY

12 Years
Quality Assurance

30 Years
Power Output Guarantee



KEY FEATURES



16BB Half-cut Cell Technology



Industry Leading High Yield



Excellent Anti-PID Performance



Wider Application




IP68 Junction Box




Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)										
Operating Voltage (Vmpp/V)										
Operating Current (Impp/A)										
Open-Circuit Voltage (Voc/V)										
Short-Circuit Current (Isc/A)										
Module Efficiency (%)										

STC: Irradiance 1000W/m², Spectra at AM1.5, Module Temperature 25 C . Power output tolerance: 0~+5W, Test uncertainty for Pmax: ±3%
 NMOT: Irradiance 800W/m², Spectra at AM1.5, Ambient Temperature 20 C , Wind speed 1m/s

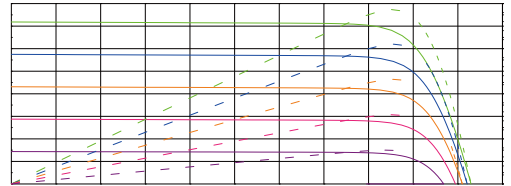

— — — — —

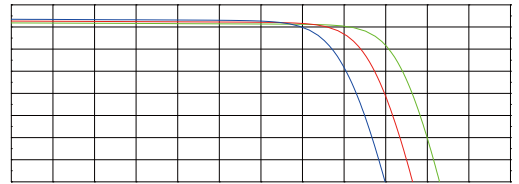

— — —

