



# BIPRO

TD6172M **144-cell**

435 - 455W

9BB

PERC

## 体系及产品认证

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



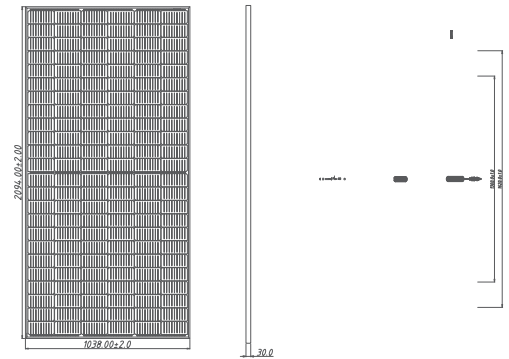
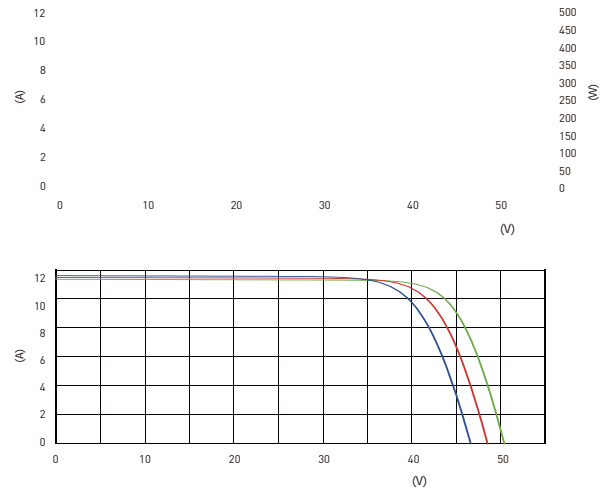
## 质量保证



	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	435	323	440	327	445	330	450	334	455	338
	41.4	38.7	41.6	38.9	41.8	39.1	42.0	39.3	42.2	39.4
	10.51	8.36	10.58	8.41	10.65	8.47	10.72	8.52	10.79	8.57
	49.8	46.6	50.0	46.8	50.2	46.9	50.4	47.1	50.6	47.3
	11.16	9.00	11.22	9.04	11.29	9.10	11.36	9.16	11.43	9.21
	20.00		20.20		20.50		20.70		20.90	

	5%	10%	15%	20%	25%
	462	484	506	528	550
	41.6	41.6	41.6	41.6	41.6
	11.11	11.64	12.17	12.70	13.23
	50.0	50.0	50.0	50.2	50.2
	11.78	12.34	12.90	13.46	14.03

	9BB
	144 (6*24)
	2094*1038*30mm (82.44*40.87*1.18 )
	28.0kg (61.73lbs)
	2.0mm
	2.0mm
	IP68 3
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

	36	36(USA)
	792	648