

电性能参数

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
(Pmax/W)	360	267	365	271	370	275	375	278	380	282
(Vmpp/V)	34.3	31.6	34.6	31.9	34.9	32.1	35.2	32.3	35.5	32.6
(Impp/A)	10.50	8.46	10.56	8.50	10.61	8.55	10.66	8.60	10.71	8.64
(Voc/V)	40.7	37.9	40.9	38.0	41.1	38.2	41.3	38.4	41.5	38.6
(Isc/A)	11.15	9.00	11.20	9.04	11.26	9.09	11.31	9.13	11.37	9.17
(%)	19.70		20.00		20.30		20.60		20.90	
STC	1000W/m ² ,		AM1.5,		25		0~+5W		± 3%	
NMOT()	800W/m ²		AM1.5		20		1m/s			

机械参数

	9BB
	120 (6*20)
	1755*1038*30mm (69.09*40.87*1.18)
	19.5kg (42.99lbs)
	3.2mm
	IP68, 3
	4mm ² (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

应用条件

	1000V/1500V/DC
	-40°C~+85°C
	20A
	Class


温度系数

Pmax	-0.36%/°C
Voc	-0.26%/°C
Isc	+0.043%/°C
NMOT	43± 2°C

包装

	36	36(USA)
(40'HC)	988	936

I-V曲线

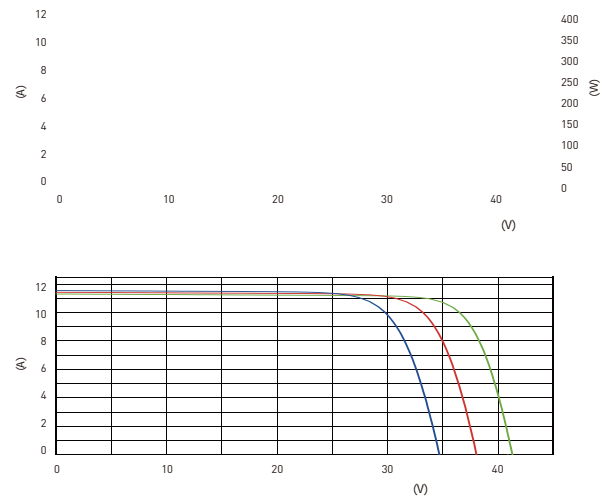

技术图



OnMO nA