



BISTAR

TP7F54M
TP7F54M(H) **108-cell**

395 - 415W

10BB PERC



体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



质量保证

12

25

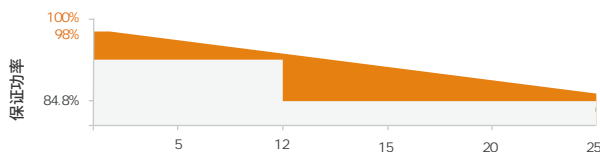

产品特性



10BB半片电池技术

2%

0.55%



显著降低热斑风险



更一度电成本

2%



优秀的抗PID性能

PID
85 / 85% RH 192



IP68接线盒

	20.20	20.50	20.70	21.00	21.30

	10BB
	108 (6*18)
	1722*1134*30mm (67.80*44.65*1.18)
	21.5kg (47.4lbs.)
	IP68, 3
	4mm ² (IEC), 12AWG(UL) 350mm(+),250mm(-)
	T01/LJQ-3-CSY/MC4/MC4-EVO2- 4