



# BISTAR

TP7F 66M  
TP7F 66M(H) **132-cell**

**485 - 505W**

10BB PERC



## 体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



## 质量保证

12

25

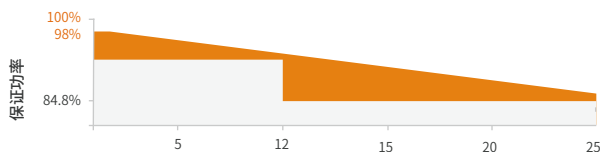

## 产品特性



**10BB半片电池技术**

2%

0.55%



**显著降低热斑风险**



**更一度电成本**

2%



**优秀的抗PID性能**

PID  
85 / 85% RH 192





**IP68接线盒**

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	485	362	490	365	495	369	500	372	505	376
	37.87	35.3	38.02	35.5	38.17	35.6	38.32	35.7	38.47	35.9
	12.81	10.23	12.89	10.29	12.97	10.36	13.05	10.42	13.13	10.49
	45.16	42.5	45.31	42.6	45.46	42.8	45.61	42.9	45.76	43.1
	13.70	11.04	13.78	11.11	13.86	11.17	13.94	11.24	14.02	11.30
	20.40		20.60		20.80		21.10		21.30	

	10BB
	132 (6*22)
	2094*1134*35mm (82.44*44.65*1.38 )
	26.6kg (58.6lbs.)
	3.2mm
	IP68, 3
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class

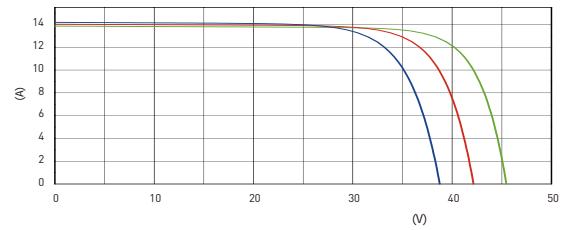

	31	31(USA)
	682	682

